


GAUGE PROTECTOR

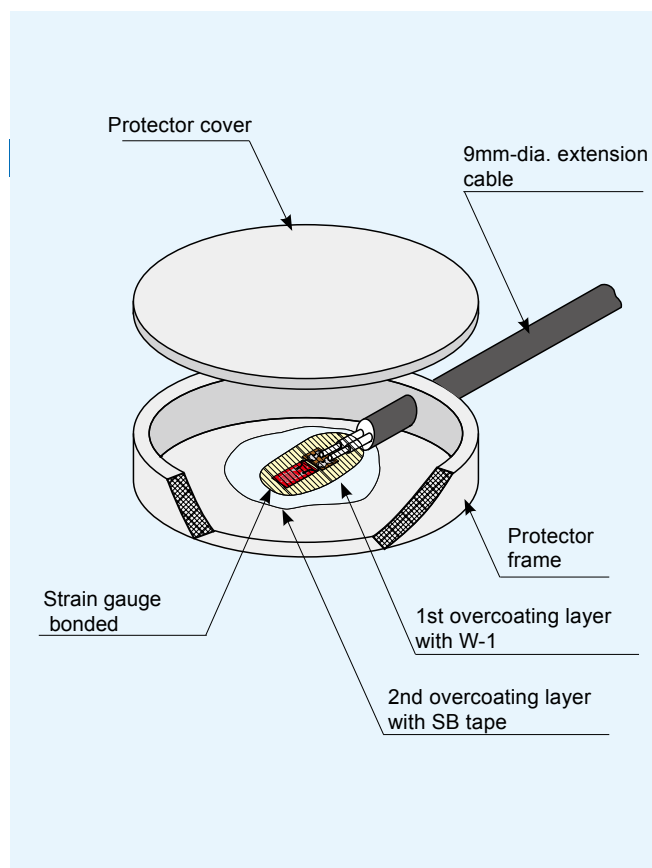


This rubber protector is designed to protect gauges which are bonded onto metal surface from the environment for long-term measurement. The strain gauge is packed inside together with the applied adhesive and overcoating materials. The protector is also provided with a hole for cable intake. It allows the entire area to be isolated from ambient conditions which may affect reliable measurement, and enhances the coating performance.

Specifications

Dimensions	Frame: ϕ 100mm (Inner ϕ 92mm) x 15mm (Height) Cover: ϕ 100mm x 3mm (Thick)
Operating temperature	-20 ~ +80°C
Extension cable	ϕ 9mm cable recommendable



COATING TAPE for reinforcing bar

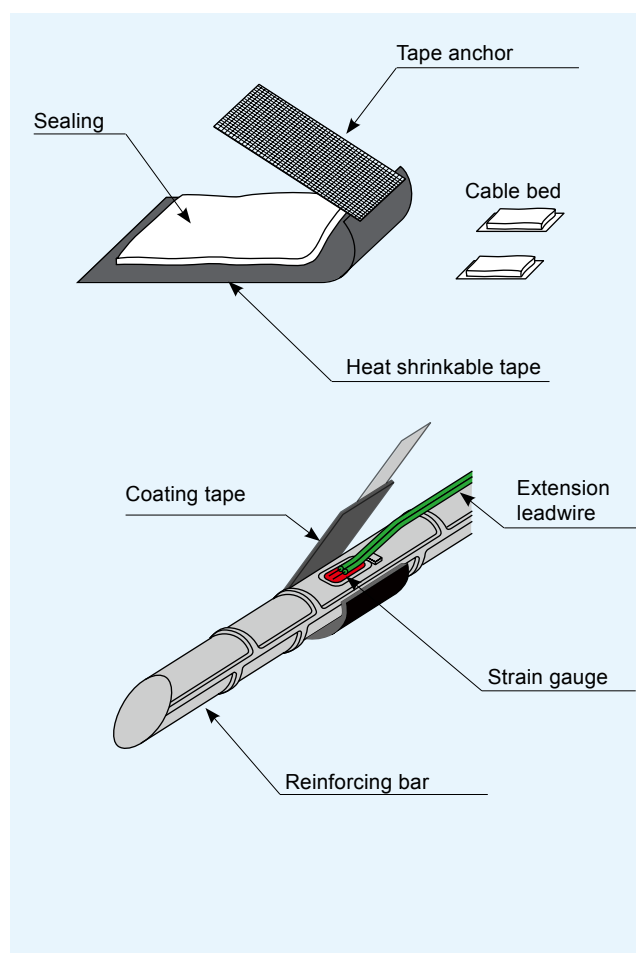

This tape is specially designed for use as a waterproof coating for stain gauges bonded onto reinforcing bars or other cylindrical surfaces. Coating is achieved by simply taping it onto the surface to save considerable time in comparison with conventional procedures. (A heat gun is required for application.)

Specifications

Operating temperature: -20~+80°C

Type	Applicable re-inforcing bar	Qty. per box	Strain gauges	Size finish (example)	
				Reinforcing bar	Dia. x Width (mm)
CT-D04	D4	10	FLK-2-11	D4	ϕ 10x21
CT-D06	D6	10	FLK-2-11	D6	ϕ 12x21
CT-D10	D10	10	FLK-2-11	D10	ϕ 15x21
CT-D13	D13	10	FLA-3-11	D13	ϕ 19x26
CT-D16	D16	10	FLA-3-11	D16	ϕ 21x26
CT-D25	D19~D25	10	FLA-3-11	D25	ϕ 31x31
CT-D35	D29~D35	10	FLA-3-11	D32	ϕ 37x35

